

HAL 39xy

Sept/2020



HAL 39xy Stray-Field Robust 3D Position Sensor with Digital Output Interfaces

HAL 39xy is a new generation of 3D position sensors from TDK-Micronas addressing the need for stray-field robust position sensors (linear and angular) as well as the ISO 26262 compliant development.

This sensor family consists of four members:

- ◆ HAL 3900 features an SPI interface and various low-power modes.
- ◆ HAL 3930 supports a PWM/SENT interface and a switch output. The switch output is configurable as high-/low-side switch. The switch signal can be derived from various sources along the signal path.
- ◆ HAL 3970 features an SPC (Short PWM Code) output with trigger pulse and ID selection.
- ◆ HAL 3980 offers a PSI5 interface.

All devices can measure a 360° angular range as well as linear movements. HAL 3900 and HAL 3930 support the option for 3D position detection. Depending on the device, it is possible to transmit temperature-compensated values of B_x , B_y , B_z or up to two calculated angles. The HAL 3980 it is also capable of transmitting the angular speed.

All devices offer setpoint linearization with either 33 equidistant distributed setpoints or 17 variable setpoints.

The sensors measure the position of a magnet, based on 3D HAL® technology from TDK-Micronas. The devices are able to suppress external magnetic stray fields by using an array of Hall plates. Only a simple two-pole magnet is required to measure a rotation angle. Off-axis measurements are also possible.

The sensors are defined as SEooC (Safety Element out of Context) ASIL B ready according to ISO 26262.

Major characteristics like gain and offset, reference position, etc. can be adjusted to the magnetic circuitry by programming the non-volatile memory.

The devices are designed for operation in an ambient temperature range of -40 °C up to 150 °C.

The HAL 39xy family is available in a very small eight-pin SOIC8 package.

Features

- ◆ Accurate angular measurement up to 360° and linear position detection
- ◆ 3D position detection
- ◆ Robust against magnetic stray-fields
- ◆ ASIL-B ready (SEooC according to ISO 26262)
- ◆ Wide supply voltage range: 3.0 V to 16 V
- ◆ Configurable output slew rates
- ◆ 0.1 kHz to 2 kHz PWM frequency (up to 13 bit)
- ◆ SENT according to SAE J 2716 rev. 4
- ◆ Support of three different SENT frames
 - H.1: Two 12 bit fast channels (position & temperature or magnetic amplitude)
 - H.2: 12 bit fast channel
 - H.4: 12 bit secure single sensor
- ◆ SPC interface with ID selection mode, rolling counter, temperature information
- ◆ SPI interface (slave) with low-power modes
- ◆ PSI5 interface according to rev. 2.2
- ◆ $T_A = -40\text{ °C}$ up to 150 °C
- ◆ Programming via the sensor's output pin or VSUP for HAL 3980

HAL 39xy

Sept/2020

Major Applications

HAL 39xy is a potential solution for the following application examples:

- ◆ Chassis position
- ◆ Turbo-charger actuators
- ◆ Valve position detection
- ◆ EGR
- ◆ Shift position
- ◆ Steering angle
- ◆ Fuel-level measurements
- ◆ Clutch position
- ◆ Transmission position detection

Development Tools

HAL 39xy can be programmed during the final manufacturing process by adjusting the output signals directly to the input signal. With this calibration procedure, the tolerances of the sensor, the magnet, and the mechanical positioning can be compensated in the final assembly.

TDK-Micronas offers an easy-to-use evaluation kit for engineering:

- ◆ Micronas programmer board (TDK-MSP V1.x)
- ◆ USB programming kit
- ◆ LabVIEW™ programming software for Windows® including Sub VIs

License Note: HAL 39xy uses licenses of Fraunhofer Institute for Integrated Circuits IIS.

Available Types

Type	Output Format	Output Signals	Other Features
HAL 3900	SPI	Up to two angles or values of B_x , B_y , and B_z	<ul style="list-style-type: none"> ◆ Low-power mode with wake-up by magnetic field/position information change/wake-up pin ◆ 16-bit data with CRC and rolling counter ◆ 10 MHz SPI
HAL 3930	PWM/SENT/Switch	Up to two angles	<ul style="list-style-type: none"> ◆ Push-pull or open-drain output ◆ Programmable switching levels
HAL 3970	SPC (Short PWM Code)	One angle and temperature	<ul style="list-style-type: none"> ◆ Secure rolling counter ◆ Enhanced 12-bit serial message
HAL 3980	PSI5 rev. 2.2	One angle and angular speed	<ul style="list-style-type: none"> ◆ PSI5 rev. 2.2 and support of frames of rev. 1.3 ◆ Asynchronous mode, synchronous parallel and universal bus mode, variable time-triggered bus mode

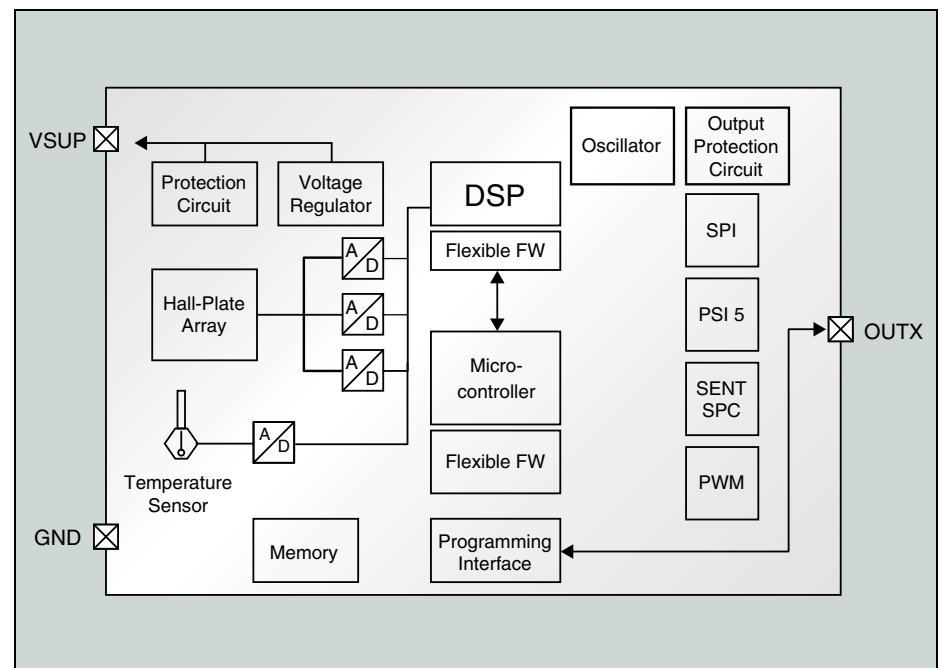


Fig. 1: Block diagram of the HAL 39xy

All information and data contained in this product information are without any commitment, are not to be considered as an offer for conclusion of a contract, nor shall they be construed as to create any liability. Product or development sample availability and delivery are exclusively subject to our respective order confirmation form. By this publication, TDK-Micronas GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use.

No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of TDK-Micronas GmbH.

Edition Sept. 24, 2020; Order No. PI000164_002EN